


Optical adaptor

Features

- Low insertion
- High back reflection
- Compliant ICE standard
- Compliant telcordia GR-326-CORE standard

Applications

- CATV Fiber Optics Link
- SDH Fiber Transmission
- Test equipment

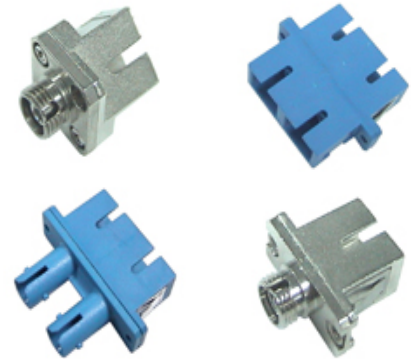

Performance Specifications

<u>FC, SC, ST, LC</u>					
Parameter	Unit	Single Mode			Multimode
		PC	UPC	APC	
Insertion Loss	dB	≤0.2	≤0.2	≤0.2	≤0.3
Return Loss	dB	NA			
Repeatability	dB	≤0.1(500 times)			
Interchange ability	dB	≤0.1(500 times)			
Connection durability	times	≥1000			
Relative humidity	%	95			
Operating Temperature	°C	-40~+75			
Storage Temperature	°C	-40~+85			

Material

ITEM	MATERIAL
Ferrule	Zirconia
Housing for adaptor	ABS
Clamp	Stainless steel